




EPOXY PIGMENT HP

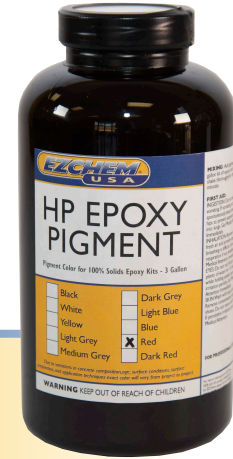

PIGMENT COLOR FOR 100% SOLIDS EPOXY KITS

EPOXY PIGMENT HP IS A 100% SOLIDS, CONCENTRATED, TINT SYSTEM SPECIALLY FORMULATED FOR EZCHEM EZ-100 PRODUCTS. EPOXY PIGMENT HP IS FORMULATED WITH HIGH QUALITY, ULTRA-FINE PARTICLE PIGMENTS THAT EASILY DISPERSE IN EZ-100 EPOXYS.

PRODUCT HIGHLIGHTS

- 10 brilliant standard colors to choose from
- Very economical, easy and decorative way to coat a variety of concrete substrates
- Easily disperses into EZ-100 products
- Very easy way to create a beautiful, solid color concrete surface

USES

Any concrete surface where a solid, high build is desired:

- Warehouses
- Auto Service Centers
- Laboratories
- Aircraft hangers
- Garages
- Quartz & Metallic flooring base coats

QUICK LOOK:

Solids Content: 100%
Toxicity: Harmful if swallowed
VOC's: N/A
Flammability: None
Color: Various
Coverage: * Varies

**Coverage rates may vary depending on porosity, texture, application method and prior sealer application. Excess buildup should be avoided.*

FOR MORE INFORMATION,
PLEASE SEE SDS.





EPOXY PIGMENT HP

SURFACE PREP & APPLICATION CONDITIONS:

Concrete surface must be clean and free of all contaminants and water. Do not apply if rain is forecast within 24 hours. If moisture is present or if the surface is not clean and free of all contaminants, the sealer may have white spots and have premature delamination and failure.

Substrate and air temperature must be no less than 40°F and not exceed 80°F. If applied outside these limits the sealer may not achieve adequate film formation. Note that in direct sunlight, substrate temperature can exceed 150°F which can cause extreme bubbling issues.

APPLICATION & CLEAN UP:

Mixing: Mix desired amount in EZ-100 Epoxy Part A for 1-2 minutes using a squirrel mixer at a slow speed to avoid introducing air to the products prior to mixing Parts A & B. Material may separate during long term storage. Remix as needed. Usage rates vary depending on substrates, surface texture, porosity and desired look. A test area is recommended to achieve desired results.

Application: Review the Technical Data and MSDS for the EZ-100 Epoxy product you are using prior to use for surface prep instructions, application instructions, coverage rates and limits.

Caution: Do not add too much color! Apply to a test area prior to job application for desired appearance. Over pigmentation may cause color float or streaking, especially in the darker colors. Do not allow to puddle. The average usage is 1 Epoxy Pigment HP pint per 3 gallons of material for most opaque applications. For lighter colors it may take more and darker colors may take less depending on the application as well as the composition of the solvent based acrylic sealer.

Clean-up: Use xylene. Dispose of containers in accordance with local, state and federal regulations.

PRECAUTIONARY STATEMENT:

Wash hands thoroughly after handling. Do not eat, drink or smoke when using this product. Wear protective gloves/protective clothing/eye protection/face protection. Take off contaminated clothing and wash before reuse. Dispose of contents/ container according to local, state and federal regulations.

FIRST AID:

INGESTION: Do not induce vomiting. If vomiting occurs spontaneously, keep head below hips to prevent aspiration of liquid into lungs. Get Medical Attention Immediately.

INHALATION: Remove victim to fresh air and provide oxygen if breathing is difficult. Give artificial respiration if not breathing. Get Medical Attention Immediately. **EYES:** Do not rub. Flush eyes with plenty of water for 15 minutes while holding eyelids open. If irritation persists, Get Medical Attention Immediately.

SKIN: Wash with soap and water. Remove contaminated clothing and shoes. Do not reuse until cleaned. If persistent irritation occurs, Get Medical Attention.

IN CASE OF FIRE:

Use dry chemical, water fog, or CO₂ to extinguish.

FOR EMERGENCY HELP

24 Hours a Day contact:

INFOTRAC at 1-800-535-5053

Manufactured In The USA By



**Product warranty for one year from date of manufacture*

For more information on EZChem and all products manufactured by EZChem please visit our website: www.ezchemusa.com